



PRODUCT CATALOG

ASPHALT PLANT
BITUMEN EQUIPMENTS
CONCRETE BATCHING PLANT

**“Reliable
Solutions with
Over 15+ Years
of Experience”**



**“World-Class Production in Asphalt,
Bitumen and Concrete Technologies”**

www.mbaplant.com/en



“With over 15 years of engineering experience, we manufacture asphalt plants, bitumen equipment, concrete batching plants and cement equipment to world-class standards.

MBA is a symbol of trust and efficiency in the international market with its innovative designs, high quality approach, and customer-oriented solutions.”

About Us


MBA is a leading engineering and manufacturing company operating in the asphalt, bitumen, and concrete industries.

Our products are designed using modern production technologies and offer long-lasting, high-performance systems.

Each piece of equipment is specially engineered according to project requirements and undergoes meticulous quality control processes.

Our mission is to make our customers' production processes more efficient, safe, and sustainable.

Our vision is to become a trusted global technology brand that provides infrastructure solutions worldwide.

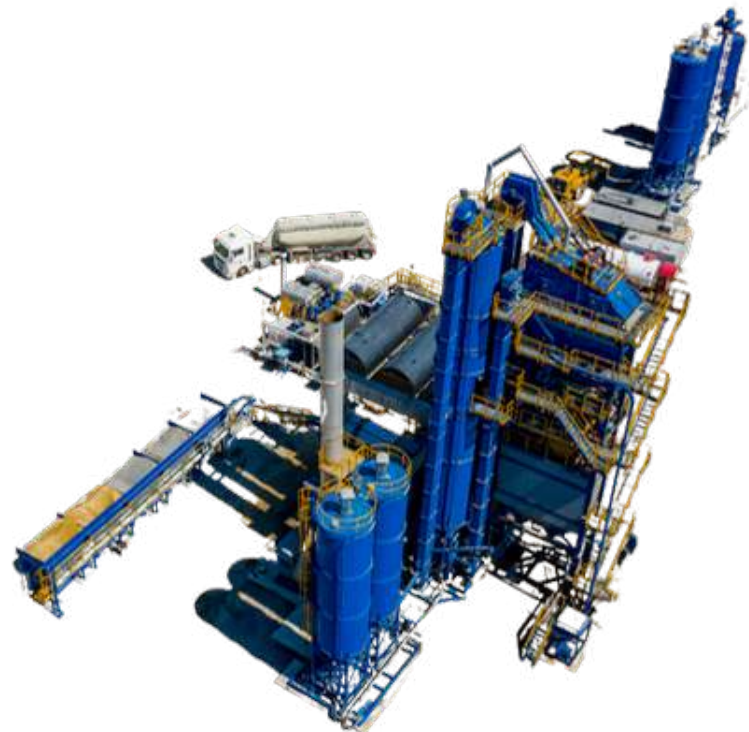

“Strength in Engineering, Trust in Quality.”

Table of Contents

P.4 - [ASPHALT PLANT](#)

P.6 - [Continuous Asphalt Plant](#)

Asphalt Plant Equipments

P.7 - [Aggregate Bin](#)

P.8 - [Aggregate Dryer](#)

P.9 - [Dust Filter](#)

P.10 - [Bucket Elevator](#)

P.11 - [Vibrating Screen](#)

P.12 - [Asphalt Mixer](#)

P.13 - [Hot Mix Asphalt Silo](#)

P.14 - [Asphalt Plant Automation](#)

Bitumen Equipments

P.15 - [Bitumen Tank](#)

P.16 - [Bitumen Storage Pool](#)

P.17 - [Thermal Oil Boiler](#)

P.18 - [Modified Bitumen Plant](#)

P.19 - [Bitumen Emulsion Plant](#)

P.20 - [Cold Mix Plant](#)

P.21 - [Bitumen Drum Decanter](#)

P.22 - [Big Bag Bitumen Decanter](#)

P.23 - [Cutback Bitumen Plant](#)

P.24 - [Cellulose Fiber Dosing System](#)

P.25 - [Bitumen Oxidation Tank](#)

P.26 - [Concrete Batching Plant](#)

P.27 - [Mobile Concrete Plant](#)

P.28 - [Stationary Concrete Plant](#)

P.29 - [Aggregate Feeding Conveyor](#)

Cement Equipments

P.30 - [Cement Silo](#)

P.31 - [Screw Conveyor](#)

P.32 - [Cement Silo Equipments](#)

P.33- [CONCRETE PLANT SPARE PARTS](#)

Sf.34 - [ASPHALT PLANT SPARE PARTS](#)



Asphalt Mixing Plant

The Best Engineering Solutions for Your Business

MBA asphalt mixing plants provide ideal solutions for modern road construction projects with high efficiency, low fuel consumption, and long service life.

Designed with a modular structure, our plants offer easy installation, low maintenance requirements, and high production capacity, making them the preferred choice of customers worldwide.

Our facilities are manufactured in capacities ranging from 80 to 320 tons/hour and are available in both stationary asphalt plant and mobile asphalt plant configurations.

High Performance, Maximum Reliability

MBA asphalt plants deliver consistent mixing quality, precise temperature control, and high production accuracy under all operating conditions.

Smart automation systems monitor the production process in real time, ensuring maximum precision in mixing ratios and stable output.

From the dryer, mixer, elevator and filter system to every other component, all equipment is engineered for maximum efficiency, energy savings, and high durability.



Asphalt Plant Specifications

CAPACITY	80 ton/hour	120 ton/hour	160 ton/hour	240 ton/hour	320 ton/hour
Aggregate Bin (Pieces)	4	4-5	4-5	4-5	4-5-6
Dryer Dimensions (mm)	Ø1600x6000	Ø1800x8000	Ø2000x8000	Ø2200x9000	Ø2400x10000
Filter Area (m ²)	280	430	550	720	850
Vibrating Screen Fraction	4	4-5	4-5	4-5	4-5-6
Cold Aggregate Silo Capacity (ton)	15	22	28	35	42
Mixer Capacity (ton/batch)	1.100	1.700	2.200	3.300	4.300
Hot Mix Asphalt Silo Capacity	-	20 ton (Optional)	25-50 ton (Optional)	30-60 ton (Optional)	30-90 ton (Optional)

Continuous Asphalt Plant

Modular Design, Fast Installation

With its continuous asphalt production principle, material flow never stops, ensuring stable production speed and lower operating costs.

Our modular design provides fast installation, easy maintenance, and flexibility. Energy-efficient burner systems, volumetric dosing, and advanced automation deliver maximum performance for your plant.

Our facilities are manufactured in capacities ranging from 80 to 240 tons/hour, available as stationary or mobile asphalt plant options suitable for different project sites.

Continuous System, Low Maintenance Cost

The MBA continuous asphalt plant maintains uninterrupted material feeding, preventing production downtime and ensuring a steady asphalt flow under all conditions. This guarantees easy asphalt production, minimal maintenance requirements, and rapid start-up.

Advanced automation systems allow real-time monitoring of production parameters, providing operators with full process control. As a result, fuel consumption is optimized and maximum mix accuracy is achieved.



Aggregate Storage Bin

Maximum Efficiency in Aggregate Feeding

- ✓ 4, 5, or 6-compartment configurations allow easy compatibility with any asphalt or concrete plant, ensuring practical transportation and fast installation.
- ✓ The bunker body manufactured from ST-37 high-strength steel offers long service life and high durability under heavy working conditions.
- ✓ Fully compatible with plant automation systems; material level, weighing, and feeding operations are monitored digitally with high precision.
- ✓ All bunker models are designed for use in both stationary and mobile plant applications, providing maximum flexibility and efficiency.

Precision Dosing & Continuous Operation

MBA aggregate bunkers deliver accurate dosing performance and fully automated feeding systems, ensuring precise mix ratios throughout the production process.

Each bunker allows separate storage of different aggregate types, enabling controlled transfer to the production line without interruptions.

With easy maintenance, a modular structure, and long-lasting high-strength steel construction, the system guarantees continuous and reliable operation.



Maximum Drying Efficiency in Asphalt Mixtures

- ✓ Provides low fuel consumption with a highly efficient heat transfer design.
- ✓ Ensures long service life with special body plates resistant to heat and abrasion.
- ✓ Operates quietly and without damage thanks to forged steel rings and specially alloyed drums.
- ✓ Offers low maintenance cost and extended service life.

Precise Heat Control, Continuous Performance

The drying process operates fully integrated with the plant automation system.

Automatic temperature sensors provide feedback to the combustion system, ensuring stable temperature control.

This prevents overheating or excessive moisture in aggregates — maintaining optimal mix quality in every batch.



Filter

Clean Air, Safe Working Conditions, Eco-Friendly Technology

- ✓ Designed to meet environmental standards at the highest level in asphalt production.
- ✓ The filter body is manufactured from high heat-resistant steel and features a special insulation coating, ensuring long service life.
- ✓ Thanks to the high-efficiency meta-aramid bag filter structure, dust levels in flue gases are minimized and harmful emissions to the environment are prevented.
- ✓ With modern reverse air flow technology, it provides extended bag life and requires minimal maintenance.

High Efficiency, Low Emissions

The MBA filter operates in full integration with the plant automation system, automatically adjusting fan speed and pressure difference.

This prevents dust accumulation in the bags, maintains filtration capacity, and maximizes energy efficiency.

Thanks to the dust recycling system, collected filler dust is reintroduced into the production process, providing both economic benefits and a zero-waste approach.



Bucket Elevator

High Conveying Efficiency and Reliability



The aggregate elevator is equipped with a chain-type system, while the filler elevator features a belt-type design.



The aggregate elevator chain is manufactured from forged steel, ensuring high durability and long service life.



Reverse backstop and soft starter systems are used in the elevator gearboxes to ensure smooth and reliable operation.



Buckets are bolted and manufactured from materials resistant to wear and high temperatures.

High Performance, Low Maintenance Cost

All MBA elevators are fully integrated with the asphalt plant automation system.

Material flow is monitored by sensors, ensuring optimum conveying capacity and energy efficiency.

Thanks to the enclosed body design, dust leakage is minimized and environmental cleanliness is maintained.

Maintenance covers and tensioning systems provide easy access, enabling fast service and safe operation.



Vibrating Screen Unit

Precision Screening, Maximum Durability

- ✓ With 4–5–6 deck screen design options, customized solutions are offered according to your project requirements.
- ✓ The wear-resistant screen body ensures high durability and long service life.
- ✓ Quick and easy maintenance is possible thanks to easily replaceable screen meshes.
- ✓ Continuous asphalt production is ensured with anti-clogging screen design.
- ✓ The dust-proof screen housing provides an environmentally friendly solution.

Long Service Life, Low Maintenance Cost

The MBA vibrating screen system is fully integrated with the plant automation, automatically controlling material flow.

This ensures consistent screening accuracy, minimizes material loss, and allows uninterrupted production.

Vibromotors and balancing systems reduce noise and vibration levels, improving operator comfort.

The robust structure and easy-access service covers guarantee long service life and low maintenance costs.



Asphalt Mixer Unit

Homogeneous Mixing, Maximum Efficiency


- ✓ Optimized paddle geometry ensures homogeneous mixing in every batch.
- ✓ The mixer body and inner linings are manufactured from special materials resistant to wear and high temperatures.
- ✓ Large access doors provide easy maintenance.
- ✓ Fully integrated with the plant automation system.
- ✓ Equipped with an additional mounting hatch for mastic asphalt production.

High Performance, Consistent Asphalt Quality

MBA mixers stand out with superior mixing homogeneity, ensuring high-quality asphalt production.

The automation system allows continuous control of mixing time and material flow. Consistent quality is achieved in every mixing cycle, delivering repeatable results.

With silent and balanced operation, the system offers reliable performance even during long working hours.

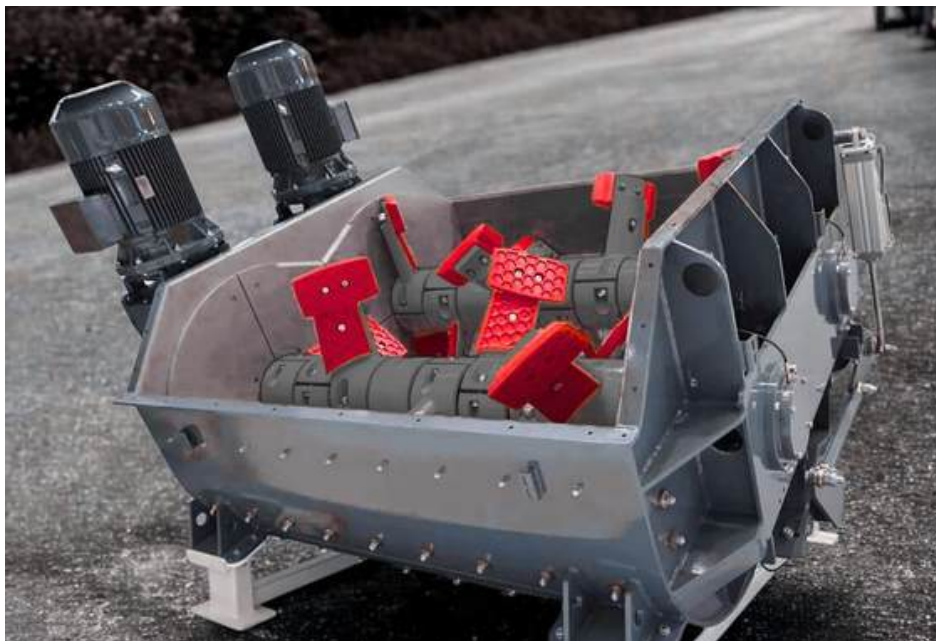

Hot Mix Asphalt Storage Bin

Hot Asphalt Storage in Various Capacities


- ✓ Fully insulated body with thermal cladding.
- ✓ Temperature and level control system.
- ✓ Heated discharge gates.
- ✓ Fully integrated with the plant automation system.
- ✓ Optional bucket-type asphalt storage system.

Optional Design, High Capacity

MBA asphalt storage bins ensure continuous loading and unloading while preserving the quality of the hot mix asphalt.

Each bin operates in synchronization with the plant control system, automatically managing loading, holding, and discharge processes.

Temperature sensors and a dedicated heating system maintain a constant mix temperature, ensuring both energy efficiency and consistent production capacity.

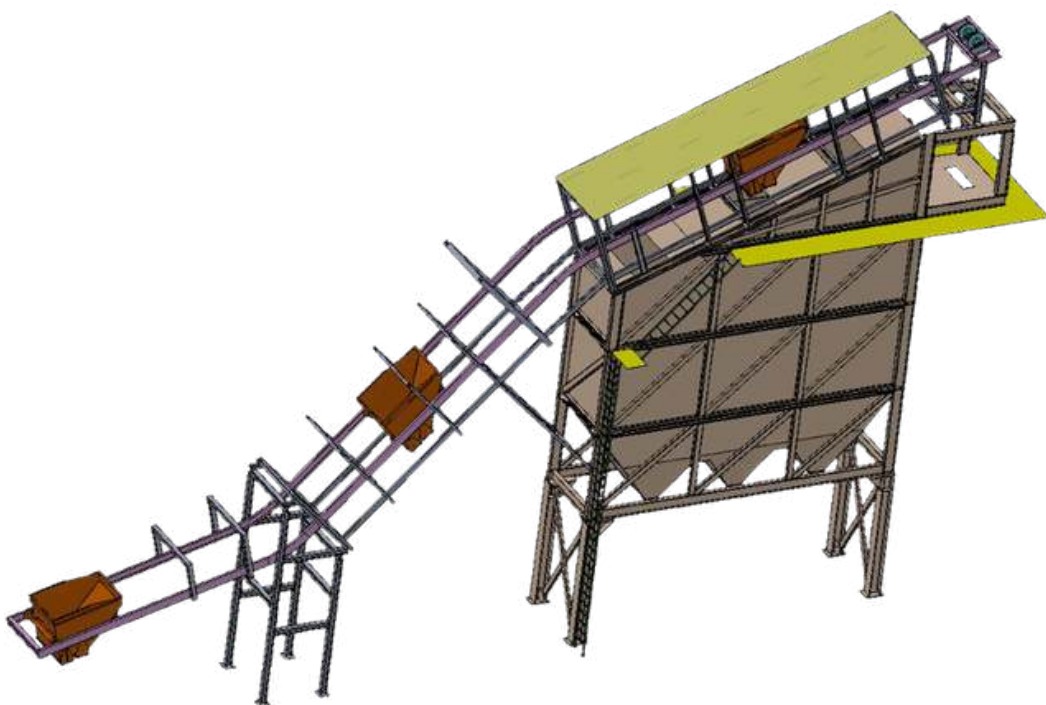

Asphalt Plant Automation System



Asphalt Plant Components

Automatic Control, Uninterrupted Data

- ✓ User-friendly computer-based interface.
- ✓ PLC and SCADA-based control system.
- ✓ Real-time data monitoring and recording.
- ✓ Remote access and fault diagnostics support.
- ✓ Unlimited recipe storage capability.

High Precision, Full Integration

The MBA automation system is designed to fully integrate all asphalt plant components (aggregate bins, elevators, dryer, mixer, storage bins, filters).

All processes are digitally monitored and reported, ensuring mixing accuracy, energy efficiency, and operational continuity.

The system can be easily controlled via the operator panel; alarms and deviations in production parameters are instantly detected and reported.

This ensures full control over production and maintains a high level of operational safety.



Bitumen Tank

Fast Heating, High-Quality Insulation

- ✓ Available in horizontal or vertical design options.
- ✓ Fully insulated steel body.
- ✓ Thermal oil or electric heating system.
- ✓ Automatic temperature and level control.
- ✓ Bitumen storage capacity from 25 to 5000 tons.

High Safety, Low Energy Consumption

MBA bitumen tanks are optimized for high thermal efficiency and energy savings.

The automatic control panel continuously monitors temperature, level, and circulation parameters to ensure stable operating conditions.

Heating coils are manufactured from high heat-transfer steel pipes, providing homogeneous heat distribution. In electric heating systems, flanged-type special resistances ensure precise temperature control.

Additionally, maximum safety is guaranteed through leak testing and double-sided welding.



Underground Bitumen Pool

Complete Bitumen Handling
& Processing Equipment

High-Capacity Bitumen Storage

- ✓ Capacity options ranging from 500 m³ to 10,000 m³.
- ✓ Custom-designed reinforced concrete pool tailored to project requirements.
- ✓ Lower investment cost with high storage capacity.
- ✓ Pre-heating chamber for fast bitumen transfer.
- ✓ Specially designed base structure suitable for bitumen flow.
- ✓ Rapid heating with thermal oil boiler system.

Project-Specific Solutions

Bitumen pools are specially designed storage units for the safe and controlled storage of large volumes of bitumen in high-capacity asphalt plants.

The system is engineered according to your production capacity and delivered as the most suitable solution for your facility.

The thermal oil heating system ensures uniform temperature distribution throughout the pool, preventing solidification and localized overheating.

With advanced temperature and level control systems, bitumen quality is maintained and unexpected production interruptions are minimized.



Thermal Oil Heater

Fast Heating, High Efficiency


- ✓ Capacity range from 250,000 to 2,000,000 kcal/h.
- ✓ Fully insulated, heat-resistant steel body.
- ✓ Diesel, natural gas, or fuel oil burner options.
- ✓ High-temperature resistant thermal oil pump.
- ✓ Refractory concrete lining on front and rear doors reduces heat loss and ensures effective thermal insulation.

High Safety, Long Service Life

MBA thermal oil heaters are equipped with automatic burner control, temperature sensors, and pressure safety systems.

The entire system is protected with advanced safety mechanisms against overheating, pressure increase, and circulation failures.

Heating coils are manufactured from seamless pipes with high heat transfer coefficients, ensuring homogeneous heat distribution.

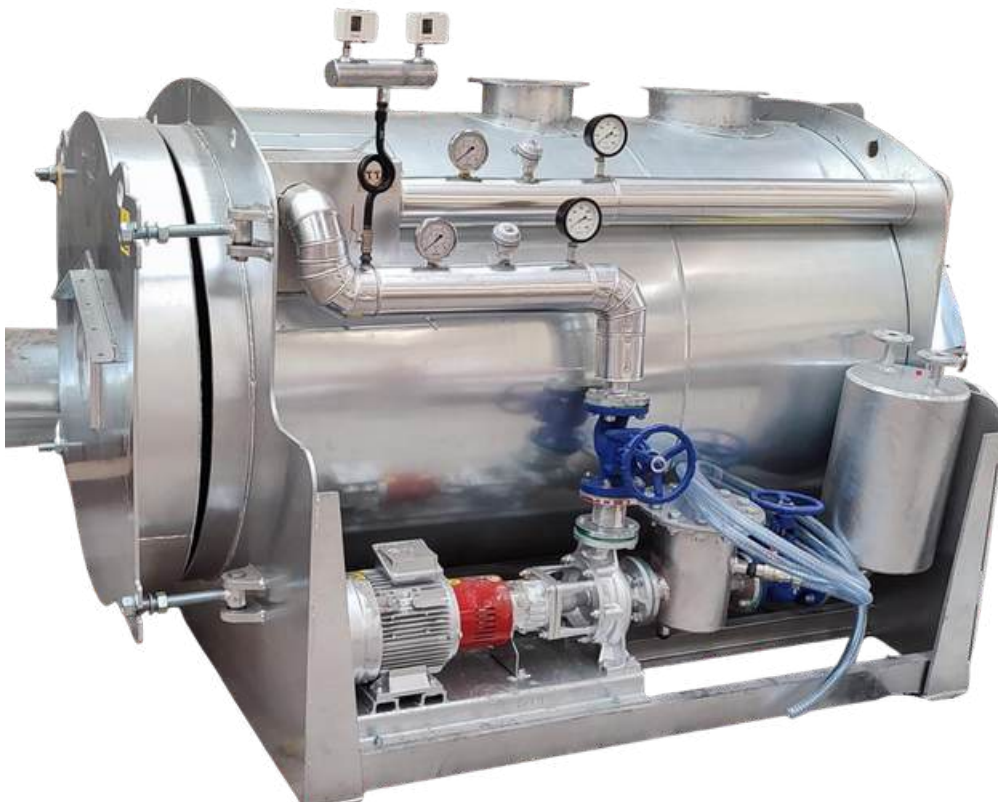

POLYMER MODIFIED BITUMEN PLANT



Complete Bitumen Handling
& Processing Equipment

High-Quality Mill, Superior Performance

- ✓ Production capacity of 10–15–20 tons/hour
- ✓ Compatible with SBS, EVA, or APP polymers
- ✓ High-shear modification mill
- ✓ Automatic and manual operation options
- ✓ Mixing tanks ensuring homogeneous polymer-bitumen blending
- ✓ User-friendly software system
- ✓ Compact design providing advantages in transportation

High Safety, Easy Transportation

MBA polymer modified bitumen plants ensure long-lasting, safe, and stable production thanks to high-performance mixing and heating systems.

All processes, including mixing ratios and bitumen circulation, are fully managed through an automatic control system.

Homogeneous heat distribution is achieved through hot oil circulation in the tank body, eliminating the risk of polymer-bitumen separation or degradation.

The compact skid-mounted design of the plant provides ease of transportation.



BITUMEN EMULSION PLANT

Complete Bitumen Handling
& Processing Equipment

High Precision, Perfect Mixing

- ✓ Production capacity of 5 – 10 – 15 – 20 tons/hour
- ✓ Hot oil or electrical heating system
- ✓ Dual-inlet, anti-foaming mill design
- ✓ Stainless steel solution tank
- ✓ Suitable for anionic and cationic bitumen emulsion production
- ✓ Automatic and manual operation modes
- ✓ User-friendly system with recipe saving feature

Quality and Long Service Life

MBA bitumen emulsion plants provide repeatable quality in every batch thanks to a high-precision dosing system and flowmeter-controlled production mechanism.

The bitumen and solution mixture is precisely dosed via an automatic flow control system, ensuring stable emulsion production.

All solution-contact surfaces are made of stainless steel, offering resistance to acids, bases, and high temperatures.

Thanks to its compact structure, the plant is easy to transport, quick to install, and has low maintenance costs.



COLD MIX PLANT

Complete Bitumen Handling
& Processing Equipment

High Capacity, Long Service Life

- ✓ Production capacity of 400 – 600 tons/hour
- ✓ Aggregate bins with 20 m³ capacity
- ✓ Grid system preventing oversized aggregate entry
- ✓ Speed-controlled dosing conveyors
- ✓ Homogeneous mixing with twin-shaft mixer
- ✓ Wear-resistant liners suitable for hard aggregates such as granite and basalt
- ✓ Continuous production with stock bin up to 20 m³

High-Quality Mixing, Flexible Design

MBA cold mix plants provide the capability to produce stabilized base and subbase materials, cold asphalt, and various mixtures using additives such as cement, bitumen emulsion, or foamed bitumen.

The system ensures fully recipe-controlled production through speed-controlled dosing conveyors and automatic PLC control.

All mixing processes are carried out in a twin-shaft mixer, ensuring high-density and homogeneous mixing.

The heavy-duty structure guarantees long service life with minimal maintenance requirements.



BITUMEN DRUM DECANTER PLANT

Complete Bitumen Handling
& Processing Equipment

Fast Bitumen Melting, Easy Operation

- ✓ Bitumen melting capacity of 5 tons/hour and 10 tons/hour.
- ✓ 10–15 ton capacity bitumen chamber ensures fast and homogeneous heating
- ✓ Thermal insulation increases energy efficiency and reduces operating costs
- ✓ Hot oil heating system provides safe heat transfer through pressure-resistant steel pipes
- ✓ Bitumen pump automatically transfers melted bitumen to service tanks
- ✓ Supplied with a thermal oil heater with a capacity of 500,000 – 1,000,000 kcal/h

Hydraulic Lid, Fast Operation

MBA bitumen drum decanter plants simplify loading operations with a hydraulic drum loading cover. Empty drums are discharged from the rear door of the unit.

Each model is designed to be directly connected to asphalt plants, polymer modified bitumen plants, or bitumen emulsion lines.

The plant is supplied with a bitumen discharge pump, bitumen filter, and control panel as standard.



BIG BAG BITUMEN MELTING PLANT

Complete Bitumen Handling
& Processing Equipment

Crane-Assisted Design, Easy Loading

- ✓ Big bag bitumen melting capacity of 5 tons/hour and 10 tons/hour
- ✓ 15–20 ton capacity bitumen chamber ensures fast and homogeneous heating
- ✓ Easy loading of big bag bitumen with crane system
- ✓ Hot oil heating system provides safe heat transfer through pressure-resistant steel pipes
- ✓ Simultaneous operation with 3–4 discharge doors
- ✓ Supplied with a thermal oil heater with a capacity of 500,000 – 1,000,000 kcal/h

Preheater, Fast Melting

MBA big bag bitumen melting plants can be optionally supplied with a crane, allowing easy loading of big bag bitumen into the feeding hoppers.

Specially designed preheaters accelerate the pre-melting process, ensuring faster overall melting performance.

The plant is supplied with a bitumen discharge pump, bitumen filter, and control panel as standard.



CUTBACK BITUMEN PLANT

Complete Bitumen Handling
& Processing Equipment

MC Bitumen Production, Compact Design

- ✓ Production capacity of 5 – 20 tons/hour
- ✓ PLC-controlled automatic dosing and mixing system
- ✓ High-performance mill ensuring homogeneous mixing
- ✓ Flow control of bitumen and solvent (kerosene, diesel, etc.)
- ✓ Compact and portable design
- ✓ Explosion-proof (Ex-proof) motors for safe operation

Safe Design, Precise Dosing

MBA cutback bitumen plants enable the production of various cutback formulations through a precise control system that allows solvent addition at different ratios.

The fully PLC-controlled system automatically monitors temperature, flow rates, and mixing ratios.

All pumps are equipped with explosion-proof motors to ensure maximum operational safety.



CELLULOSE ADDITIVE UNIT

Complete Bitumen Handling
& Processing Equipment

Automatic Dosing for Stone Mastic Asphalt Production

- ✓ Cellulose fiber weighing and dosing unit
- ✓ Fiber storage silo and screw conveyor system
- ✓ Blower and piping line transferring fiber to the mixer
- ✓ Precise weighing and transfer system for each batch
- ✓ Compact and portable design

Compact Design, Suitable for All Plants

The cellulose additive unit automatically feeds pre-weighed cellulose fiber into the mixer line for each production batch.

Thanks to its high accuracy, the system ensures a consistent mixing ratio in every batch, improving overall production quality.

The system is equipped with a dust-proof enclosed structure and an automatic control panel.

It can be integrated with all types of asphalt plants, ensuring continuous and uninterrupted production.



BITUMEN OXIDATION TANK

High Temperature, Controlled Reaction

- ✓ 20–80 ton blown bitumen production capacity
- ✓ Heating system resistant up to 300°C
- ✓ Homogeneous oxidation with controlled air distribution system
- ✓ Thermal insulation minimizing heat losses
- ✓ Compressor and pneumatic system according to capacity


Complete Bitumen Handling & Processing Equipment

Controlled Production, High-Quality Oxidized Bitumen

MBA oxidation tanks provide modified bitumen production by air blowing, improving the properties of pure bitumen.

In this process, bitumen is oxidized under controlled temperature and airflow, resulting in increased hardness, softening point, and viscosity.

Oxidized bitumen is widely used in waterproofing membranes, insulation materials, and industrial coating applications.

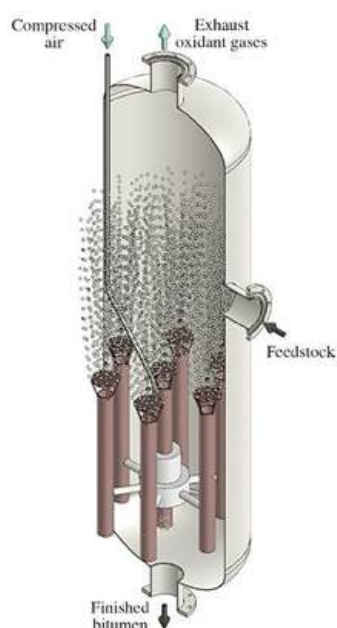

CONCRETE BATCHING PLANT

Mobile or Stationary, Customized for Your Project

- ✓ 30–160 m³/hour concrete production capacity
- ✓ Single shaft, twin shaft, and planetary mixer options
- ✓ Precise weighing and dosing systems for aggregates, cement, water, and additives
- ✓ Robust structure designed for harsh site conditions and continuous production
- ✓ Compact and portable design
- ✓ Remote monitoring and reporting system

Precise Dosing, High-Quality Concrete Production

MBA concrete batching plants are designed to produce high-quality concrete with maximum efficiency.

High production capacity, durable construction, and advanced automation systems ensure superior performance.

All plants are equipped with PLC-based control systems that manage every stage of production, ensuring consistent quality and optimal efficiency.



STATIONARY CONCRETE BATCHING PLANT

Modular Structure, High Capacity

- ✓ 100–120–160 m³/hour concrete production capacity
- ✓ Twin shaft, pan, and planetary mixer options
- ✓ Precise weighing and dosing systems for aggregates, cement, water, and additives
- ✓ Modular design for easy installation, dismantling, and transportation
- ✓ Fully automated production with PLC-based control system
- ✓ All production data can be monitored via PLC, with access to historical production reports

Robust Chassis, Long Service Life

MBA stationary concrete batching plants are designed for industrial projects requiring high production volumes.

With capacities ranging from 100 to 160 m³/hour, they ensure continuous production for dams, infrastructure, precast, and large-scale construction projects.

The high-strength steel structure and advanced automation system provide long service life and reliable operation.



MOBILE CONCRETE BATCHING PLANT

Fast Installation, Maximum Efficiency

- ✓ 30–100 m³/hour production capacity
- ✓ Single shaft, twin shaft, pan, and planetary mixer options
- ✓ Precise weighing and dosing systems for aggregates, cement, water, and additives
- ✓ Quick commissioning structure
- ✓ Long service life with high-quality components
- ✓ Fully automated control system via PLC

Mobile Power, Flexible Operation

MBA mobile concrete batching plants are designed for projects requiring rapid installation and frequent site relocation.

Thanks to their compact and transportable design, the production site can be easily changed, and installation can be completed within a few days.

All systems are controlled by PLC-based automation, ensuring automatic management of weighing, mixing, and batching processes.

The durable steel chassis and protected equipment layout provide long service life and low maintenance costs.



AGGREGATE FEEDER

Concrete Plant Equipment

Smart Design, High Efficiency

- ✓ Mobile and stationary options
- ✓ Foldable design for quick installation and dismantling
- ✓ 60° rotating aggregate discharge chute with camera control
- ✓ Design that does not require a retaining wall

Easy Control, Fast Installation

MBA aggregate feeders enable high-efficiency transfer of materials from the aggregate stock area to the feeding bunker in concrete batching plants.

The camera-controlled monitoring system allows operators to remotely control the process and ensures safe operation.

Additionally, the design eliminates the need for a retaining wall, reducing both installation costs and construction time.



CEMENT SILO

Safe Storage, Maximum Durability

- ✓ Welded or bolted manufacturing options
- ✓ 100, 200, 300, 500, 1000, 2000 ton cement storage capacity
- ✓ Fast cement transfer with screw conveyor
- ✓ Fully equipped with level indicators, pressure relief and discharge lines
- ✓ Modular design for easy transportation



High Safety, Long Service Life

MBA cement silos are designed for the safe, efficient, and long-term storage of cement in concrete and mortar production facilities.

Thanks to their high-strength steel structure, the silos are resistant to harsh operating conditions and environmental effects.

The filtration system minimizes dust emissions during silo filling, while pressure relief and discharge systems ensure safe operation.

With a compact, modular, and transportable design, MBA cement silos offer easy installation, fast commissioning, and low maintenance costs.



CEMENT SCREW CONVEYOR

Continuous Flow, High Performance

- ✓ Production in diameters ranging from Ø168 mm to Ø323 mm
- ✓ Manufactured from high-quality steel
- ✓ Adjustable universal connection
- ✓ Heavy-duty hanger bearing
- ✓ Gear motor driven system for high efficiency
- ✓ Easy maintenance and long-lasting bearing system

High Safety, Long Service Life

MBA cement screw conveyors are designed for the safe transfer of cement, ash, lime, and similar powder materials between hoppers, silos, and mixers.

Thanks to their high-quality steel body, cold-formed helices, and durable bearing system, they ensure maximum efficiency with minimum maintenance even under heavy working conditions.

Optional inlet hoppers, discharge flanges, and connection accessories make them fully compatible with all types of stationary and mobile concrete batching plants.

All models provide leak-proof operation and vibration-free performance, ensuring both environmental safety and quiet operation.



CEMENT SILO EQUIPMENT

Cement Handling
Solutions



Manual or Pneumatic
Butterfly Valve



Silo Filter



Level Sensor



Air Jet



Fluidizing Air Pad



Pressure Safety Valve



Vibrating Cone



Vibro Motor

CONCRETE BATCHING PLANT SPARE PARTS



**Mixer Arms, Paddles and
Cast Parts**




Conveyor Belt



Load Cell



Concrete Plant Cylinders

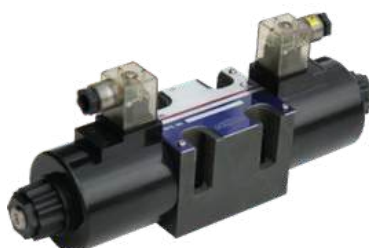

Hydraulic Valve



Pneumatic Valve



Actuated Ball Valve



**Automatic Lubrication
System**



Mixer Bearings and Housings

ASPHALT PLANT

SPARE PARTS



Mixer Arms, Paddles, and Cast Parts



Conveyor Belt



Filter Bags



Dryer Ring, Rollers and Flights



Elevator Chain



Elevator Bucket



Gas, Diesel, Fuel Oil and Liquid Fuel Burners



Bitumen (Asphalt) Filter



Bitumen (Asphalt) Valve

ASPHALT PLANT SPARE PARTS



Thermal Oil Pump



Bitumen (Asphalt) Pump



Bitumen Flow Meter



Bitumen Emulsion Mill



Modified Bitumen Mill



Thermal Oil Valve



Pneumatic Valves



Cylinders



"Trusted Solutions for
Asphalt, Bitumen and
Concrete Production"

Contact Information



Saray Sanayi Sitesi, Saray, 48. cadde No: 20/B
Kahramankazan/Ankara /TÜRKİYE



+90 546 726 06 06
(Whatsapp, Telegram)



export@mbaplant.com



15+ Years of
Experience



Export to 20+
Countries



100+ Projects
Delivered



